



Wireless
Connectivity
for Video
Surveillance

BreezeACCESS® VL SU-Video

Alvarion's BreezeACCESS VL SU-Video is a cost-effective, flexible wireless access infrastructure ideally suited for the diverse needs of the video surveillance market. Providing strategic, wire-free outdoor connectivity for a broad range of cameras and sensors, it ensures highly effective video surveillance services in the 5 GHz spectrum.



Wireless Video Surveillance

Video surveillance is a top priority for government, business and private sectors. A rapidly expanding market, it is generating a growing business challenge to meet demands for safety and security with efficient, easy-to-deploy, cost-effective solutions.

Wireless connectivity offers video surveillance solutions the combination of reduced deployment costs, flexibility in the placement of cameras and optimization of bandwidth allocation. Alvarion's extensive experience in the development and deployment of customized wireless communications systems ensures reliable and resilient mission-critical solutions, specifically designed and optimized for the video surveillance market.

Ideal Solution for a Range of Video Surveillance Applications

- Government installations
- Urban centers
- Homeland security
- Educational institutions and public buildings
- Transportation centers such as airports, railways, ports and bridges
- Traffic congestion control
- Personal security services

Robust Multipoint Solution

The BreezeACCESS VL SU-Video solution consists of two main units:

BreezeACCESS VL Access Unit (AU)



A base station (AU) supporting two optional configurations:


- Stand-alone micro base station
- Modular shelf base station universal chassis holding up to 6 AU modules

Each configuration includes indoor and outdoor units. The indoor unit connects to the network through a standard Ethernet 10/100BaseT (RJ-45) Interface and to the outdoor unit using a CAT-5 cable.

BreezeACCESS VL Subscriber Unit (SU)



Enables the seamless connection of single or multiple video cameras to the base station. This platform enables always-on, high-speed, low latency quality of service (QoS), and supports an optimized asymmetric video link of 8 Mbps in the uplink and 2 Mbps in the downlink. The subscriber unit connects to the network via a standard Ethernet 10/100BaseT (RJ-45) interface and connects to its outdoor part via CAT-5 cable.

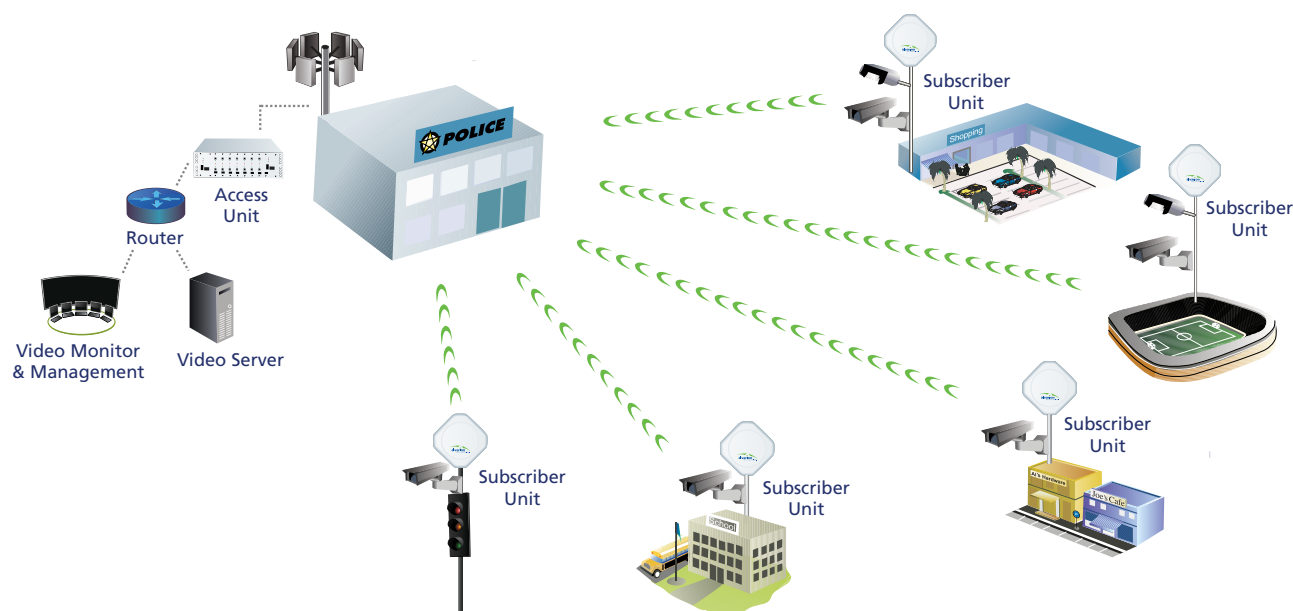

System Highlights

- Premium 5 GHz PtMP solution
- Optimized bandwidth for video surveillance
- QoS for video and voice applications using WLP
- Secure connectivity (FIPS 197 certified)*
- Carrier-class outdoor link reliability and availability
- Ultimate versatility and robustness
- TDD OFDM technology, supporting NLOS deployments
- Coverage range of up to 30 km
- Capacity of up to 32 Mbps per sector
- Configurable MIR/CIR per CPE per direction
- Scalable pay-as-you-grow configurations

* Certification in future release

System Advantages

Quality Connectivity	Optimized asymmetric bandwidth allocation dedicated to video streaming needs and providing cost-effective quality connectivity.
Flexibility	Cameras can be located exactly where required and transferred when necessary, since the system is free of wired infrastructure restraints and ensures full tactical communications in every possible configuration. Using adaptive modulation the link can be optimized to any new deployment location.
Quick Integration	Standard-based solution which secures infrastructure investments and is operational with all surveillance cameras and applications. Quick installation using the LED bar to maximize the CPE signal.
Compelling Business Case	Requires less base stations and eliminates complex cabling and related mounting fixtures, reducing installation and on-going maintenance costs.
Maximizes Modularity	NLOS support, high bandwidth capacity, increased coverage, multi-subscriber profiles in same sector and network.
Powerful Access	Proven robust system enabling best of class service delivery, including long range and high capacity service. Dynamic frequency selection (DFS), with unique Alvarion algorithm improves channel management in low radar activity conditions. The Access Unit automatically selects algorithm for best possible service, rapid antenna alignment and SLA enforcement.
Security	Built-in encryption and a host of secure management and authentication functions.
Reliable	Ruggedized solution operating over an extended temperature range.



Headquarters

International Corporate HQ
corporate-sales@alvarion.com

North America HQ
n.america-sales@alvarion.com

Sales Contacts

Australia:
anz-sales@alvarion.com

Asia Pacific:
ap-sales@alvarion.com

Brazil:
brazil-sales@alvarion.com

Canada:
canada-sales@alvarion.com

Caribbean:
caribbean-sales@alvarion.com

China:
cn-sales@alvarion.com

Czech Republic:
czech-sales@alvarion.com

France:
france-sales@alvarion.com

Germany:
germany-sales@alvarion.com

Italy:
italy-sales@alvarion.com

Ireland:
uk-sales@alvarion.com

Japan:
jp-sales@alvarion.com

Latin America:
lasales@alvarion.com

Mexico:
mexico-sales@alvarion.com

Nigeria:
nigeria-sales@alvarion.com

Philippines:
ph-sales@alvarion.com

Poland:
poland-sales@alvarion.com

Portugal:
sales-portugal@alvarion.com

Romania:
romania-sales@alvarion.com

Russia:
info@alvarion.ru

Singapore:
asean-sales@alvarion.com

South Africa:
africa-sales@alvarion.com

Spain:
spain-sales@alvarion.com

U.K.:
uk-sales@alvarion.com

Uruguay:
uruguay-sales@alvarion.com

For the latest contact information
in your area, please visit:
[http://www.alvarion.com/index.php/en/
company/worldwide-offices](http://www.alvarion.com/index.php/en/company/worldwide-offices)



© Copyright 2010 Alvarion Ltd. All rights reserved.
Alvarion® its logo and all names, product and service
names referenced herein are either registered trademarks,
trademarks, tradenames or service marks of Alvarion Ltd. in
certain jurisdictions.
All other names are or may be the trademarks of their
respective owners. The content herein is subject to change
without further notice.
"WiMAX Forum" is a registered trademark of the WiMAX
Forum. "WiMAX," the WiMAX Forum logo, "WiMAX
Forum Certified" and the WiMAX Forum Certified logo are
trademarks of the WiMAX Forum.

Specifications

Radio

Frequency
5.47 - 5.725 GHz, 5.725 - 5.850 GHz

Radio access method
Time Division Duplex TDD

Channel
10 MHz, 20 MHz (auto)

Central frequency resolution
5 MHz, 10 MHz

Capacity
AU Capacity: 32 net FTP/ 54 gross
SU Capacity: 8 Mbps uplink, 2 Mbps
downlink

Sensitivity, typical (dBm at antenna port, @10-6)

Modulation	1	2	3	4	5	6	7	8
Level* (20 MHz)	-89	-88	-86	-84	-81	-77	-73	-71
Level* (10 MHz)	-92	-91	-89	-87	-84	-80	-76	-74

* Modulation Level combines modulation scheme and coding gain.

Data Communications

VLAN support
Based on IEEE 802.1q , QinQ 802.1ad

Layer-2 traffic prioritization
Based on IEEE 802.1p

Layer-3 traffic prioritization
IP ToS according to RFC791 and DSCP
according to RFC2474

Layer-4 traffic prioritization
UDP/TCP port range

Security
WEP 128-bit authentication,
AES 128, WEP 128, and certified
FIPS-197 mode built in encryption

Configuration and Management

Local and remote management
Monitor via Telnet, SNMP and
configuration upload/download

Remote management access
From wired LAN, wireless link

Management access protection
Multilevel password
Configuration of remote direction
(from Ethernet only, wireless only,
or both sides)
Configuration of IP addresses of
authorized stations

Software upgrade
Via TFTP and FTP

Configuration up/download
Via TFTP and FTP

SNMP agents
SNMP v1 client, MIB II, Bridge MIB,
Private BreezeACCESS VL MIB

Physical and Electrical

Type	Connectors		Outdoor Unit
SU-A, SU-E, AU-SA	Ethernet	10/100BaseT RJ-45, 2 embedded	Power consumption 25 W AC input: 100-240 VAC, 50/60Hz DC option available
	Radio	LEDs	
	AC IN	10/100BaseT Ethernet RJ-45	
PS (IDU)	Indoor	3-pin AC power plug 10/100Base RJ-45 with waterproof	54 VDC from indoor to outdoor
AU-BS	Ethernet	sealing assembly 10/100BaseT RJ-45, 2 embedded	Power consumption 30 W (module plus outdoor unit) AC input: 100-240 VAC, 50/60 Hz 3.3 VDC, 54V from power supply in backplane
	Radio	LEDs 10/100BaseT Ethernet RJ-45	
	AC-IN	3-pin power plug	
BS-PS-AC-VL (AC power supply)	AC-IN	3-pin power plug	Power consumption: 240 W, full chassis (1 PS, 6 AU) AC input: 85-265 VAC, 47-65 Hz DC output: 54V, 3.3V
BS-PS-DC-VL (DC power supply)	-48 VDC	3-pin DC D-Type 3 power pin plug Amphenol	Power consumption: 240 W, full chassis (1 PS, 6 AU) DC input: -48 VDC nominal (-34 to -72), 10 A max. DC output: 54V, 3.3V

Standard Compliance

Type
Standard

EMC
FCC Part 15 class B, CE EN55022
class B

Safety
UL 1950, EN 60950

Environmental
ETS 300 019 part 2-3 class 3.2E for
indoor units
ETS 300 019 part 2-4 class 4.1E for
outdoor units

Storage
ETS 300 019-2-1 class 1.2E

Transportation
ETS 300 019-2-2 class 2.3

Lightning protection
EN 61000-4-5, class 3 (2kV)

Radio
FCC part 15, FCC P.90,
EN 301 893 (V 1.3.1)

Note: Not all options are available in all regions and some features require software licensing key. Please contact your local representative for further information.

About Alvarion

Alvarion (NASDAQ:ALVR) is a global 4G communications leader with the industry's most extensive customer base, including hundreds of commercial 4G deployments. Alvarion's industry leading network solutions for broadband wireless technologies WiMAX, TD-LTE and WiFi, enable broadband applications for service providers and enterprises covering a variety of industries such as mobile broadband, residential and business broadband, utilities, municipalities and public safety agencies. Through an open network strategy, superior IP and OFDMA know-how, and ability to deploy large scale end-to-end turnkey networks, Alvarion is delivering the true 4G broadband experience today (www.alvarion.com)